



**SOT-23 Plastic-Encapsulate Transistors****SS8050**

TRANSISTOR (NPN)


**FEATURES**

- Complementary To SS8550 (PNP)

**MARKING****Equivalent Circuit**

|       |           |           |           |
|-------|-----------|-----------|-----------|
| HFE   | 120-400   |           |           |
| RANK  | L         | H         | J         |
| RANGE | 120 - 200 | 200 - 350 | 300 - 400 |

SOT - 23



1. BASE
2. EMITTER
3. COLLECTOR









**MAXIMUM RATINGS** ( $T_a=25^{\circ}\text{C}$  unless otherwise noted)

| Symbol          | Parameter                                        | Value    | Unit                 |
|-----------------|--------------------------------------------------|----------|----------------------|
| $V_{CBO}$       | Collector-Base Voltage                           | 40       | V                    |
| $V_{CEO}$       | Collector-Emitter Voltage                        | 25       | V                    |
| $V_{EBO}$       | Emitter-Base Voltage                             | 5        | V                    |
| $I_C$           | Collector Current                                | 1.5      | A                    |
| $P_C$           | Collector Power Dissipation                      | 300      | mW                   |
| $R_{\theta JA}$ | Thermal Resistance From Junction To Ambient      | 417      | $^{\circ}\text{C/W}$ |
| $T_J, T_{stg}$  | Operation Junction and Storage Temperature Range | -55~+150 | $^{\circ}\text{C}$   |

**ELECTRICAL CHARACTERISTICS** ( $T_a=25^{\circ}\text{C}$  unless otherwise specified)

| Parameter                            | Symbol        | Test conditions                                          | Min | Typ | Max | Unit          |
|--------------------------------------|---------------|----------------------------------------------------------|-----|-----|-----|---------------|
| Collector-base breakdown voltage     | $V_{(BR)CBO}$ | $I_C=100\mu\text{A}, I_E=0$                              | 40  |     |     | V             |
| Collector-emitter breakdown voltage  | $V_{(BR)CEO}$ | $I_C=0.1\text{mA}, I_B=0$                                | 25  |     |     | V             |
| Emitter-base breakdown voltage       | $V_{(BR)EBO}$ | $I_E=100\mu\text{A}, I_C=0$                              | 5   |     |     | V             |
| Collector cut-off current            | $I_{CBO}$     | $V_{CB}=40\text{V}, I_E=0$                               |     |     | 0.1 | $\mu\text{A}$ |
| Collector cut-off current            | $I_{CEO}$     | $V_{CE}=20\text{V}, I_E=0$                               |     |     | 0.1 | $\mu\text{A}$ |
| Emitter cut-off current              | $I_{EBO}$     | $V_{EB}=5\text{V}, I_C=0$                                |     |     | 0.1 | $\mu\text{A}$ |
| DC current gain                      | $h_{FE(1)}$   | $V_{CE}=1\text{V}, I_C=100\text{mA}$                     | 120 |     | 400 |               |
|                                      | $h_{FE(2)}$   | $V_{CE}=1\text{V}, I_C=800\text{mA}$                     | 40  |     |     |               |
| Collector-emitter saturation voltage | $V_{CE(sat)}$ | $I_C=800\text{mA}, I_B=80\text{mA}$                      |     |     | 0.5 | V             |
| Base-emitter saturation voltage      | $V_{BE(sat)}$ | $I_C=800\text{mA}, I_B=80\text{mA}$                      |     |     | 1.2 | V             |
| Transition frequency                 | $f_T$         | $V_{CE}=10\text{V}, I_C=50\text{mA}$<br>$f=30\text{MHz}$ | 100 |     |     | MHz           |

## Typical Characteristics

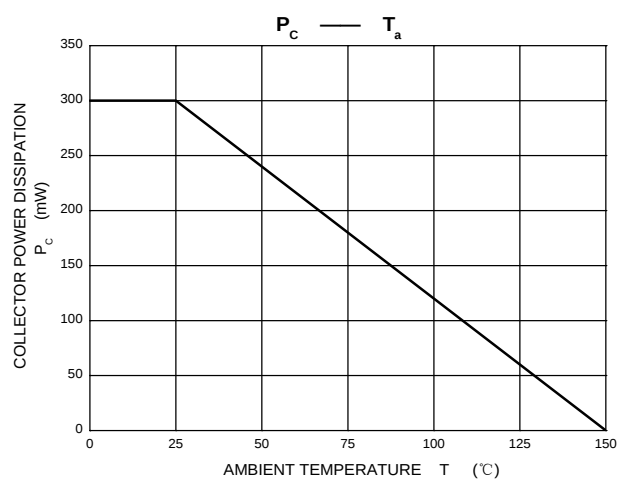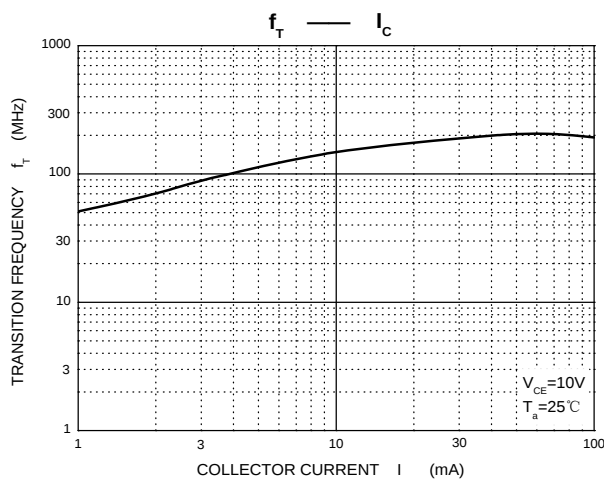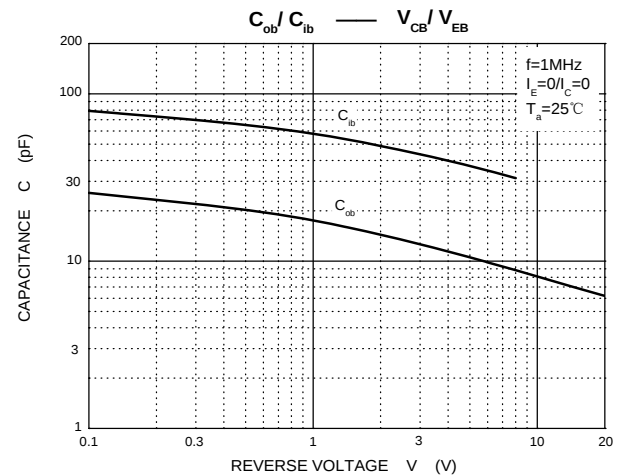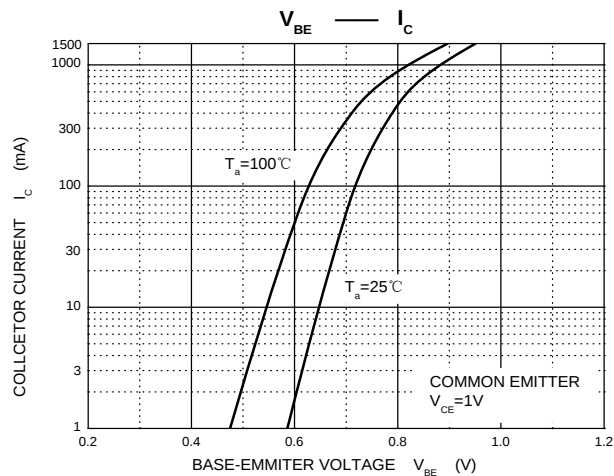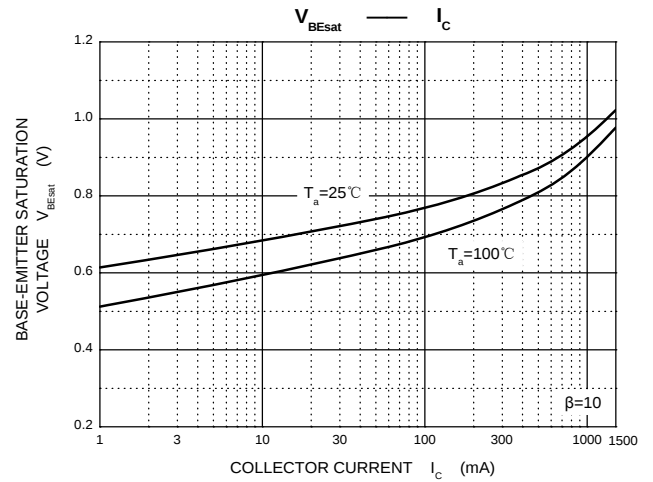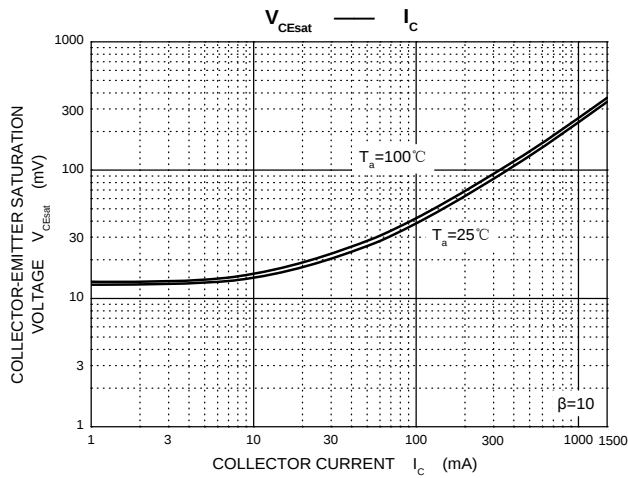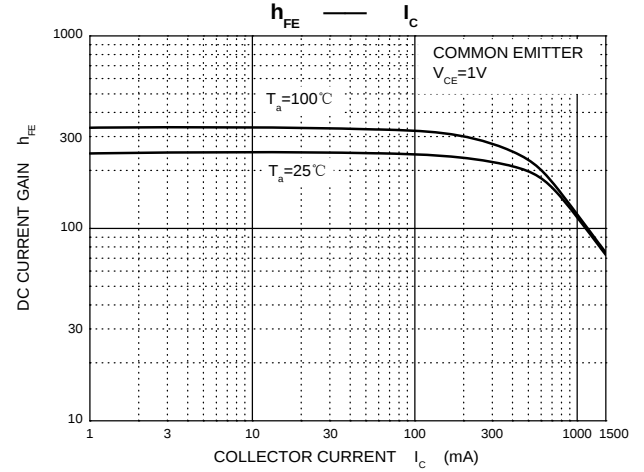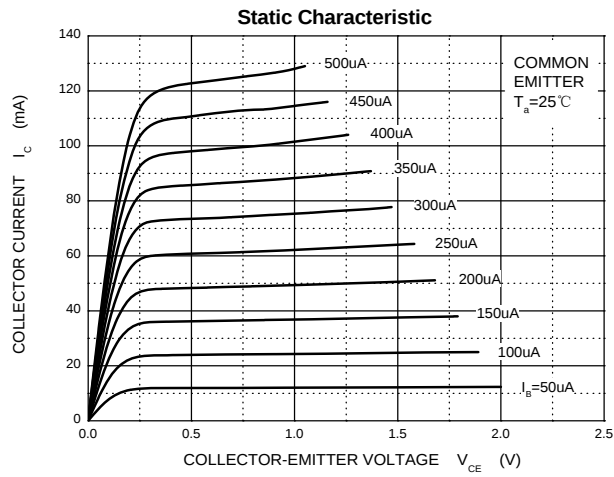


Package Outline Dimensions (SOT-23)



| Symbol   | Dimensions In Millimeters |       | Dimensions In Inches |       |
|----------|---------------------------|-------|----------------------|-------|
|          | Min                       | Max   | Min                  | Max   |
| A        | 0.900                     | 1.150 | 0.035                | 0.045 |
| A1       | 0.000                     | 0.100 | 0.000                | 0.004 |
| A2       | 0.900                     | 1.050 | 0.035                | 0.041 |
| b        | 0.300                     | 0.500 | 0.012                | 0.020 |
| c        | 0.080                     | 0.150 | 0.003                | 0.006 |
| D        | 2.800                     | 3.000 | 0.110                | 0.118 |
| E        | 1.200                     | 1.400 | 0.047                | 0.055 |
| E1       | 2.250                     | 2.550 | 0.089                | 0.100 |
| e        | 0.950 TYP                 |       | 0.037 TYP            |       |
| e1       | 1.800                     | 2.000 | 0.071                | 0.079 |
| L        | 0.550 REF                 |       | 0.022 REF            |       |
| L1       | 0.300                     | 0.500 | 0.012                | 0.020 |
| $\theta$ | 0°                        | 8°    | 0°                   | 8°    |

Suggested Pad Layout (SOT-23)



Note:  
1.Controlling dimension:in millimeters.  
2.General tolerance:± 0.05mm.  
3.The pad layout is for reference purposes only.